

XKS/EKS

ELETTROPOMPE SOMMERGIBILI IN PVC
WATER SUBMERSIBLE PUMPS



APPLICAZIONE

- Elettropompa leggera e maneggevole, la sua affidabilità è garantita da una doppia protezione contro infiltrazioni, ottenuta con tenuta meccanica e guarnizione. Tutti i componenti delle elettropompe XKS sono stati realizzati seguendo le direttive WEE, ROHS, PAHS, che ne garantiscono la totale sicurezza

UTILIZZO

- Temperatura del liquido fino a: +35°C
- Temperatura ambiente fino a: 40°C

DATI TECNICI

- Alimentazione 230-240V/50Hz
- Uscita 1 1/4
- Cavo H05RN-F 10mt
- Classe di protezione: IPX8
- Massima profondità di immersione: 7 mt

APPLICATION

- It is mainly used for water drainage in the pond, miniature landscape, bathing, domestic cultivation and solar water supply place etc. It can also be used for small equipment and water supply system for facilities.

OPERATING LIMITS

- Fluid temperature up to 35°C
- Ambient temperature up to 40°C

TECHNICAL DATA

- Supply power 220-240V/50Hz
- Outlet 1 1/4
- Cable H05RN-F 10m
- Protection class: IPX8
- Max immersion depth: 7 mt




Per acqua pulita | Clean Water

Dati tecnici | Technical Data

Mod. Acqua pulita Mod. Clean Water	Alimentazione Supply power	Potenza Power		Ampere	Prevalenza max. Max. head	Portata max. Max. flow	Max diam particelle Max. dia. of particle	Uscita Outlet	Cavo Cable	Codice Code
		kW	HP							
XKS310PL	220-240V/50Hz	0.25	0.33	1.30	7mt	10m³/h	5mm	1 1/4"	H05RN-F 10mt	10XKS310PL
XKS810PL	220-240V/50Hz	0.75	1.00	3.25	10mt	16m³/h	5mm	1 1/2"	H05RN-F 10mt	10XKS810PL

Dimensioni | Dimension

Modello Model	L (mm)	W (mm)	H (mm)
XKS310PL	174	159	256
XKS810PL	174	159	287
EKS400PD	174	159	292/327
EKS750PD	174	159	323/358

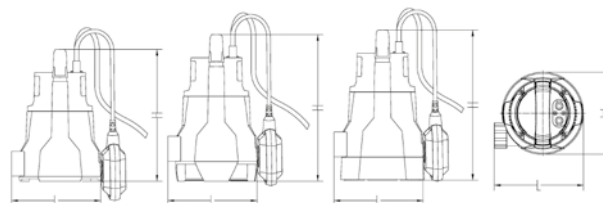

Dimensioni imballo | Package information

Modello Model	GW (Kg)	L (mm)	W (mm)	H (mm)
XKS310PL	4.1	210	165	300
XKS810PL	5.4	210	165	300
EKS400PD	4.5	210	165	330
EKS750PD	5.5	210	165	330




Diagramma prestazioni | Hydraulic Performance Curve

